


ImageIR® 8800

High-end Thermography Camera

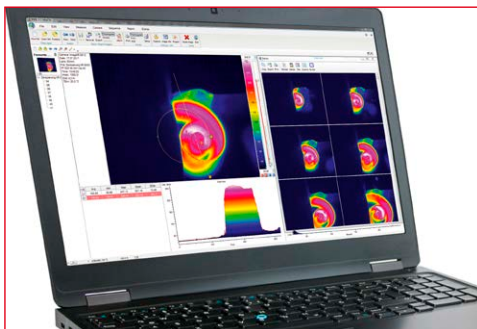

- 1) ImageIR® 8800 with interchangeable lenses from InfraTec
- 2) Software IRBIS® 3
- 3) Rotating rotor blade of a wind turbine

INFRA^{TEC}.

Europe's leading specialist for infrared sensors and measurement technology

Cooled FPA photon detector with (640 × 512) IR pixels

Opto-mechanical MicroScan with (1,280 × 1,024) IR pixels

Frame rate up to 14,593 Hz, GigE Vision compatible

Snapshot detector, internal trigger interface

Extremely short integration times in the microsecond range

Thermal resolution better than 0.025 K



www.InfraTec.eu

www.InfraTec-infrared.com

Made in Germany



Latest information on the internet.

| | |
|--|---|
| Spectral range | (7.7 ... 10.2) μm |
| Pitch | 15 μm |
| Detector | MCT |
| Detector format (IR pixels) | (640 \times 512) |
| Image format with opto-mechanical MicroScan (IR pixels)* | (1,280 \times 1,024) |
| Image acquisition | Snapshot |
| Readout mode | ITR |
| Aperture ratio | f/2.0 |
| Detector cooling | Stirling cooler |
| Temperature measuring range | (-40 ... 1,200) $^{\circ}\text{C}$, up to 2,000 $^{\circ}\text{C}$ |
| Measurement accuracy | ± 1 $^{\circ}\text{C}$ or ± 1 % |
| Temperature resolution @ 30 $^{\circ}\text{C}$ | Better than 0.025 K |
| Frame rate (full / half / quarter / sub frame)* | Up to 233 / 874 / 2,892 / 14,593 Hz |
| Window mode | Yes |
| Focus | Manually, motorised or automatically* |
| Dynamic range | Up to 16 bit |
| Integration time | (10 ... 20,000) μs |
| Rotating aperture wheel and filter wheel* | Up to 5 positions |
| Interfaces | GigE, 10 GigE*, 2 \times CAMLink*, HDMI* |
| Trigger | 3 IN / 2 OUT, TTL |
| Analogue signals*, IRIG B* | 2 IN / 2 OUT, yes |
| Tripod adapter | 1/4" and 3/8" photo thread, 2 \times M5 |
| Power supply | 24 V DC, wide-range power supply (100 ... 240) V AC |
| Storage and operation temperature | (-40 ... 70) $^{\circ}\text{C}$, (-20 ... 50) $^{\circ}\text{C}$ |
| Protection degree | IP54, IEC 60529 |
| Dimensions; weight | (244 \times 120 \times 160) mm*; 4.0 kg (without lens) |
| Further functions | Multi Integration Time* |
| Analysis and evaluation software | IRBIS [®] 3, IRBIS [®] 3 view, IRBIS [®] 3 plus*, IRBIS [®] 3 professional*, IRBIS [®] 3 control*, IRBIS [®] 3 online*, IRBIS [®] 3 process*, IRBIS [®] 3 active*, IRBIS [®] 3 mosaic*, IRBIS [®] 3 vision* |



* Depending on model

With its ImagerIR[®] 8800, InfraTec offers another top-level thermographic camera model belonging to the ImagerIR[®] high-end camera series. It is equipped with a **cooled LWIR-focal-plane array photon detector** that provides a **format of (640 \times 512) IR pixels** and operates in **snapshot mode**. Combining an **outstanding thermal resolution of better than 0.025 K** with very high frame rates of up to 14,593 Hz and **extremely short integration times of only a few microseconds** this camera qualifies for airborne biological and geological surveys, non-destructive testing and the analysis of fast thermal processes, which are related to large temperature measuring ranges. Its **modular structure which consists of optical, detector and interface modules** makes it easily adaptable to the respective application.

An **integrated trigger interface** guarantees a repeatable high-precision triggering of quick procedures. Multiple configurable digital in- and outputs serve as control ports for the camera or as generator of control signals for external devices. The optical channel consists of exchangeable infrared lens systems as well as application-specific apertures, filters and optical elements.

| Lenses | Focal length (mm) | FOV ($^{\circ}$) | IFOV (mrad) |
|-----------------|-------------------|----------------------|-------------|
| Wide-angle lens | 13 | (40.5 \times 32.9) | 1.2 |
| Standard lens | 25 | (21.7 \times 17.5) | 0.6 |
| Telephoto lens | 50 | (11.0 \times 8.8) | 0.3 |
| Telephoto lens | 100 | (5.5 \times 4.4) | 0.15 |
| Telephoto lens | 200 | (2.7 \times 2.2) | 0.08 |

Headquarters

InfraTec GmbH
Infrarotsensorik und Messtechnik
 Gostritzer Str. 61 – 63
 01217 Dresden / GERMANY
 Phone +49 351 871-8630
 Fax +49 351 871-8727
 E-mail thermo@InfraTec.de

USA office

InfraTec infrared LLC
 5048 Tennyson Pkwy.
 Plano TX 75024 / USA
 Phone +1 844-226-3722 (toll free)
 E-mail thermo@InfraTec-infrared.com

© InfraTec 09/2019 (All stated product names and trademarks remain in property of their respective owners.)
Design, specification and technical progress subject to change without prior notice.