
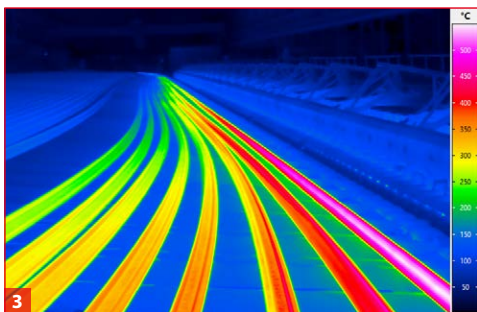
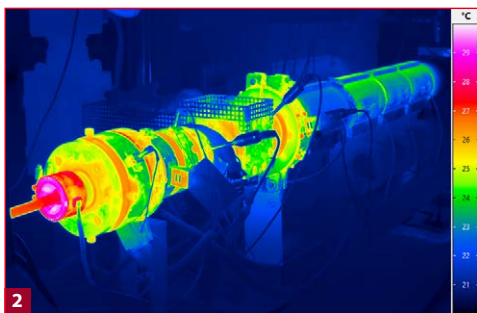


PIR uC LWIR

Stationary Thermographic Cameras for Industrial Use

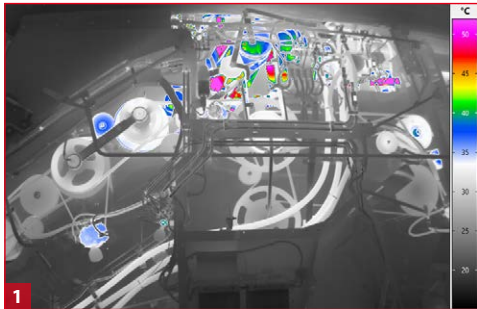

- 1) Optimisation of drive assemblies
- 2) Production in the plastics industry
- 3) Coating of railway rails

INFRA^{TEC}.

Europe's leading specialist for infrared sensors and measurement technology

Microbolometer detector with up to (640 × 512) IR pixels

Longwave spectral range (7.5 ... 14) μm

IR frame rate up to 60 Hz

Temperature measuring range of (-35 ... 545) $^{\circ}\text{C}$

Robust industrial cameras with protection degree IP65

Compact light metal housing

Attractive price-performance ratio



www.InfraTec.eu

Made in Germany



| | |
|--|---|
| Spectral range | (7.5 ... 14) μm |
| Pitch | 17 μm / 25 μm |
| Detector | Uncooled microbolometer focal-plane array |
| Detector format (IR pixels) | (640 \times 512) (320 \times 256) |
| Temperature measuring range | (-35 ... 545 $^{\circ}\text{C}$) |
| Measurement accuracy | ± 5 $^{\circ}\text{C}$ or ± 5 % |
| Temperature resolution @ 30 $^{\circ}\text{C}$ | 0.05 K |
| Frame rate (full-frame) | 30 Hz (640 \times 512) 60 Hz (320 \times 256) |
| Data interface | RS232, GigE-Vision, 1 \times DI, 1 \times DO |
| Tripod adapter | 1/4" photo thread |
| Power supply | Power over Ethernet (PoE) |
| Power consumption | Approx. 2.5 W |
| Storage and operation temperature | (-40 ... 70 $^{\circ}\text{C}$), (-15 ... 60 $^{\circ}\text{C}$)* |
| Protection degree | IP65 |
| Protective Housing | Solid industrially-suited metal housing |
| Dimensions, weight | (\varnothing 100 \times 255) mm, approx. 1.8 kg |

* Depending on model

The outer appearance suggests immediately – the **PIR uc LWIR** from InfraTec has proved itself most of all in particularly harsh conditions. The robust light metal housing reliably protects the inside of the models in this **camera series for the longwave spectral range** from climatically and mechanically extreme conditions. High temperatures, dust, dirt – these thermographic cameras with protection degree **IP65** are able to withstand very much. This qualifies them for numerous applications, such as in the area of process monitoring and security technology, which require a stationary camera for the **contactless temperature measurement on many different surfaces**. In addition to this robustness, the compact design and small dimensions simplify the integration into diverse industrial processes.

Uncooled microbolometer focal-plane array detectors with **(320 \times 256)** and **(640 \times 512) IR pixels** serve as a basis of the camera series. The choice between multiple detector formats highlights the versatility of the PIR uc LWIR. Users are offered numerous additional options in terms of further equipment features. These include the wide range of lenses, miscellaneous protective windows, an integrated air purge as well as extensive accessories.

Easy handling, enormous resistance of the cameras in continuous operation and low maintenance already characterise the PIR uc LWIR as a standalone solution. Above all, however, such characteristics qualify these models as **components of turn-key thermography automation systems**. These can be **combined** so flexibly with **numerous evaluation and analysis programs of the IRBIS[®] 3 software range**. Thus, users can adjust the control of the cameras and the recording of data optimally to their specific requirements.

Application examples

- Assembly control and process monitoring
- Monitoring of machinery and equipment
- Real-time thermography in research and development
- Early fire detection and security technology

| Detector format (IR pixels) | (320 \times 256) | (640 \times 512) |
|-----------------------------|--------------------|--------------------|
| Lens | FOV ($^{\circ}$) | FOV ($^{\circ}$) |
| Super-wide-angle lens | (63 \times 50) | (90 \times 69) |
| Wide-angle lens | (48 \times 39) | (45 \times 37) |
| Standard lens | (24 \times 19) | (25 \times 20) |
| Telephoto lens | (13 \times 11) | (12 \times 10) |
| Super-telephoto lens | (8 \times 6) | - |



Headquarters

InfraTec GmbH
Infrarotsensorik und Messtechnik
 Gostritzer Str. 61 – 63
 01217 Dresden / GERMANY
 Phone +49 351 871-8630
 E-mail thermo@InfraTec.de

USA office

InfraTec infrared LLC
 5048 Tennyson Pkwy.
 Plano TX 75024 / USA
 Phone +1 844-226-3722 (toll free)
 E-mail thermo@InfraTec-infrared.com