

PACKAGE
from **17,900 €** **
Thermographic Camera
+ Special Software
IRBIS® 3 active

Lock-in Thermography-Package for Electronics Development

Using Handheld VarioCAM® HDx or Stationary VarioCAM® HDx head

INFRAtec.

Your InfraTec Expert Package for Research and
Development incl. Software IRBIS® 3 active

Microbolometer detector with (640 × 480) IR pixels

Thermographic cameras for handheld and fixed mount use available

System integration via LabVIEW or MATLAB interfaces, SDK*

Special software IRBIS® 3 active

Automatic processing of data quantities

Real-time data connection via GigE-Interface

Microscopic lens with up to 17 µm pixel size*


640
×
480
Detector

GigE

≥ 30
mK

Lock-in Thermography Package:


VarioCAM® HDx oder
VarioCAM® HDx head
+ **IRBIS® 3 active**

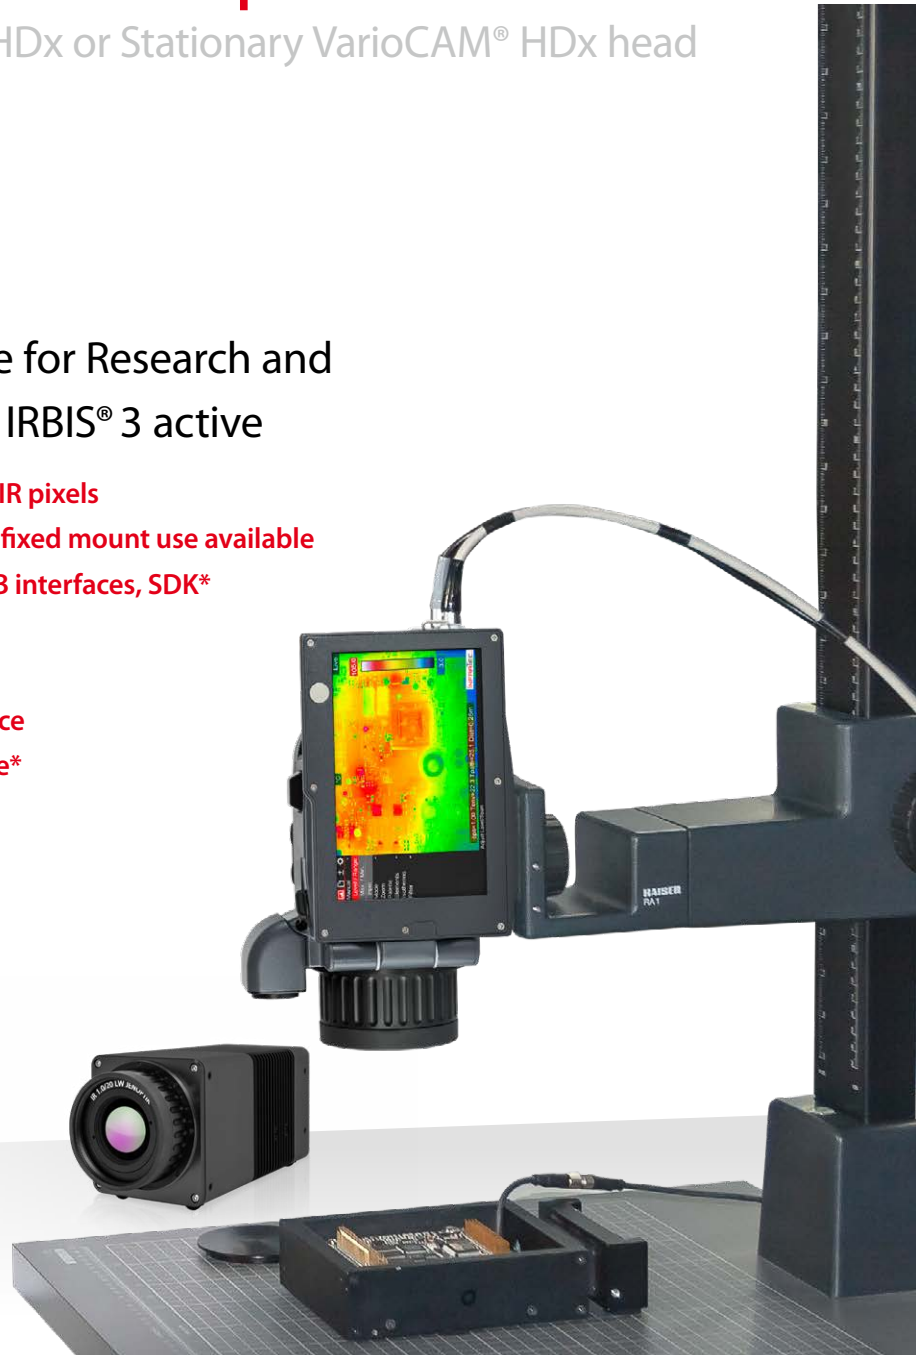

www.InfraTec.eu



Numerous interchangeable lenses are available

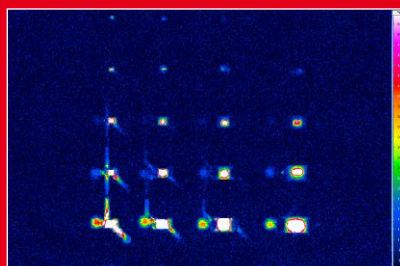

Thermogram of a demonstrator



Perform Lock-in Method using a demonstrator



Spectral range	(7.5 ... 14) µm
Detector	Uncooled microbolometer focal-plane array
Detector format (IR pixels)	(640 × 480)
Temperature measuring range	(-40 ... 600) °C, up to 1,700 °C*
Measurement accuracy	± 2 °C or ± 2%
Temperature resolution @ 30 °C	Up to 0.03 K*
Frame rate	Full-frame: 30 Hz (640 × 480), sub-frame: 60 Hz (384 × 288)
Window mode*	Yes
Storage media	SDHC Card, external control computer for camera control and data acquisition*
Image storage	Time-, trigger- and temperature controlled recording of 16 bit single frames or image sequences with timestamp, video streaming in MPEG format
Lens mount	Automatic objective detection
Focus	Motor-driven, automatic or manual, accurately adjustable, laser-supported autofocus**
EverSharp function**	Multifocal recording allows for maximum extend of sharp focus
Zoom*	Up to 32× digital, stepless
Digital colour video camera ¹	8 Megapixels, LED video light, vision mixer and cross-fade feature
Dynamic range	16 bit
Interfaces*	GigE Vision*, DVI-D (HDMI), C-Video, RS232, USB 2.01, WLAN*, Bluetooth**, Process interface**
Trigger*	2 × digital I/O, 2 × analogue I/O
Tripod adapter	1/4" photo thread
Power supply	Standard Lithium-Ion battery ¹ , energy save mode ¹ , AC adapter, (12 ... 24) V DC, PoE ^{2*}
Integrated microphone and speaker ¹	Voice annotation feature, replay and audio dubbing
Laser range finder ^{1*}	Semiconductor laser red, laser protection class 2, range up to 70 m
Integrated GPS sensor ^{1*}	Image integrated storage of position data
Display ¹	5.6" colour TFT display (1,280 × 800) pixel, 170° rotatable and 280° revolvable, daylight suited, incl. flip mirror feature
Colour viewfinder ^{1*}	Tilttable colour viewfinder with diopter compensation
Single-handed operation ¹	Intuitive operation with ergonomically arranged function keys and multifunctional joystick, programmable keys
Protection degree; storage and operation temperature	IP54 ^{1,2} respectively IP67 with screw-on interface ^{2*} , IEC 60529; (-40 ... 70) °C, (-25 ... 55) °C
Impact strength, vibration resistance in operation	25 G (IEC 68 - 2 - 29), 2 G (IEC 68 - 2 - 6)
Dimensions; weight	VarioCAM® HDx: (210 × 125 × 155) mm; 1.6 kg (basic configuration with standard lens) VarioCAM® HDx head: (221 × 90 × 94) mm; 1.15 kg (basic configuration with standard lens)
Automatic functions ¹	Autofocus, permanent autofocus, automatic distance indicator ¹ , distance-dependent display of pixel size to avoid geometrically related measurement errors ¹ , autoimage, autolevel, min. / max. temperature alarm: visual / acoustic ¹ , alarm triggered image storage ¹
Measurement functions ^{1*}	8 freely selectable, movable measurement fields / -points, automatic hot / cold spot display, globally and internally defined measurement fields, differential temperature measurement, temperature profile, histogram, differential image, isotherms display
Further functions*	Shutter-free operation, temperature alarm, image merging ¹ , synchronous display of thermal and visual image in real-time ¹ , camera internal emissivity correction ²
Analysis and evaluation software	IRBIS® 3 active
Further software packages*	IRBIS® 3, IRBIS® 3 plus, IRBIS® 3 professional, IRBIS® 3 view, IRBIS® 3 remote HD, IRBIS® 3 online, IRBIS® 3 process, IRBIS® 3 vision, IRBIS® 3 active, IRBIS® 3 mosaic

* Optional /// ¹ only VarioCAM® HDx /// ² only VarioCAM® HDx head

For professional measuring tasks using Lock-in Thermography in electronics development, InfraTec offers a complete package with thermographic cameras of the premium range together with efficient software. Both the handheld **VarioCAM® HDx** as well as the stationary **VarioCAM® HDx head** are equipped with a large microbolometer detector. In combination with light-sensitive precision, interchangeable lenses that offer maximum flexibility for different sized measurement objects and variable operating distances, users can record thermographic images with high measurement accuracy and superb image quality. The package is rounded off by the **software IRBIS® 3 active**, a modern and universally usable tool for active thermography. Through the focused introduction or generation of a heat flow, test objects are examined non-destructively for concealed material defects, cavities, cracks, joint flaws or delamination. This method suits ideally detecting faults and anomalies in the development of electronics, since a focused input of heat can normally be attained easily by means of electrical excitation. Lock-in Thermography enables defects to be detected and localised reliably even in the case of the slightest power losses.

Lens	Focal lens (mm)	FOV (°)
Wide-angle lens	10	(57.1 × 44.4)
Standard lens	20	(30.4 × 23.1)
Telephoto lens	40	(15.5 × 11.6)
Macro and microscopic lenses	Min. object distance (mm)	Pixel (µm)
Close-Up 0.2× for lens: 40 mm / 20 mm	137	60 / 121
Close-Up 0.5× for lens: 40 mm / 20 mm	47 / 47	24 / 49
Microscopic lens M=1.0×	50	17

Headquarters

InfraTec GmbH**Infrarotsensorik und Messtechnik**

Gostritzer Str. 61 – 63

01217 Dresden / GERMANY

Phone +49 351 871-8630

Fax +49 351 871-8727

E-mail thermo@InfraTec.de

USA office

InfraTec infrared LLC

5048 Tennyson Pkwy.

Plano TX 75024 / USA

Phone +1 844-226-3722 (toll free)

E-mail thermo@InfraTec-infrared.com